


Bent Drapery Track Measurement Form


1. Choose the design that best fits your room setup.
2. Measure the wall and degrees of all angles as in examples shown below.
 - Make sure to provide the return measurement "R" (distance from wall to front of drapery track as shown in red). The bent track measurement form represents wall measurements, therefore the "R" dimension **MUST BE** specified for accurate track fabrication. If "R" dimension **IS NOT** specified, drapery track will be fabricated according to dimensions (A, B, C, D, etc.) provided.
 - Return dimensions will not be considered, and measurements will be calculated from center of each bend.
 - When fabricating drapery, please add an additional 1.5 inches of drapery fabric to the anticipated return size.
3. Provide all measurements by filling out order form and submitting to Somfy.

NOTE: The following dimensions are shown from top view of the track and show various wall designs.


STYLE 1 MEASUREMENT

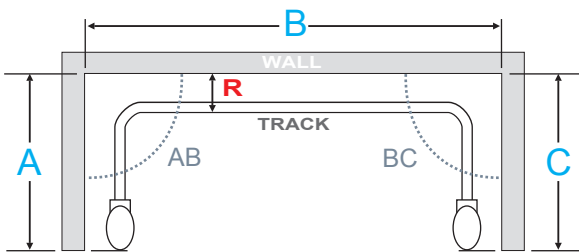


STYLE 2 MEASUREMENT

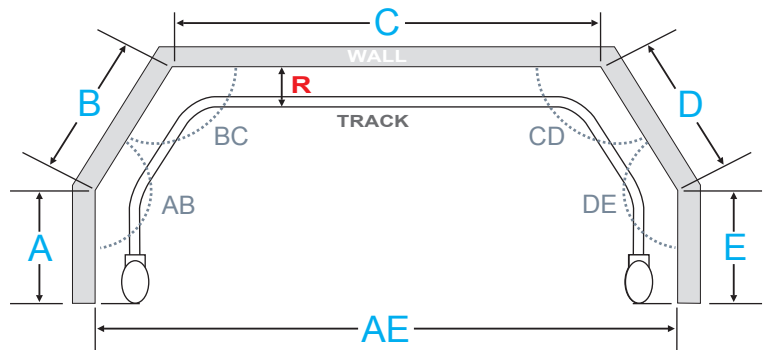


STYLE 3 MEASUREMENT

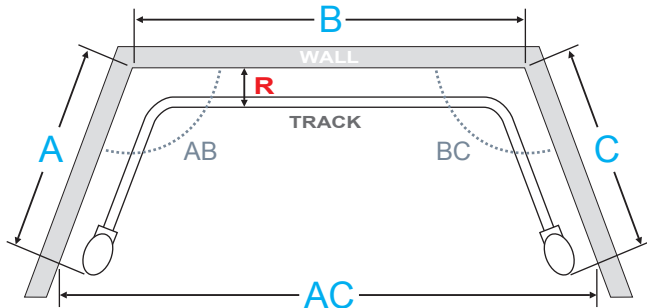

STYLE 4 MEASUREMENT

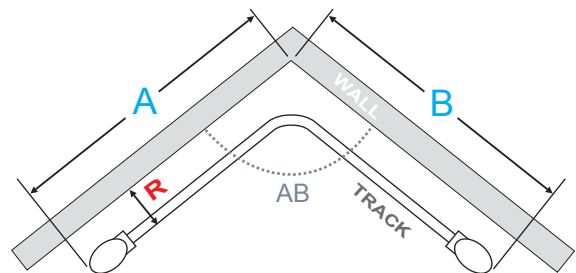

STYLE 5 MEASUREMENT *

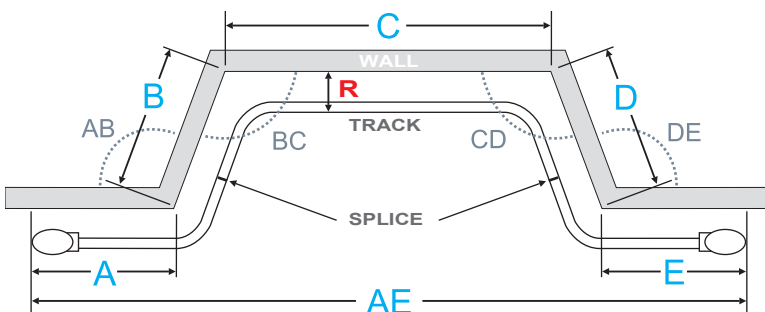

* Splices are required for this style.

TRACK 1
 "R" Dimension _____
 Style _____ Degree of _____
 A _____ Bend _____
 B _____ AB _____
 C _____ BC _____
 D _____ CD _____
 E _____ DE _____
 AC _____
 AE _____

TRACK 2
 "R" Dimension _____
 Style _____ Degree of _____
 A _____ Bend _____
 B _____ AB _____
 C _____ BC _____
 D _____ CD _____
 E _____ DE _____
 AC _____
 AE _____

NOTE: Irismo™ 45 WireFree RTS is not compatible with bends and curves.

Directions for Creating a Template for Drapery Curves

What you need: • Large piece of construction paper • Tape Measure • Marker • Tape

- 1** Start with a large piece of construction paper that exceeds the depth and length of the curve.
- 2** Place the paper on the floor or ceiling depending on the orientation of the curve.
- 3** Secure the paper with tape.
- 4** Clearly define the stacking side, motor placement, pocket depth and center line of track with the marker.
- 5** Mark the radius of the curve.
- 6** Please provide as much detail as possible and all templates must include the following:
 - Indicate "room side"
 - Note how the template was created
 - Purchase order number
 - Template created on the floor facing up (See Figure 1) *preferred method*
 - Template created on the ceiling facing down (See Figure 2)
 - Customer name
 - Company name and account number
- 7** Note the distance from the wall or the window to the center of the track.
NOTE: be sure to clear all possible obstructions such as handles, sills etc.
- 8** Identify the following measurement points:
 - Placement of motor
 - Exact stopping point of track on template
 - Total measurement of curve (See Figure 4-"C")

Please call Somfy for specialty curving applications. Depending on your particular application, your project may require special attention.

FIGURE 1: TEMPLATE ON THE FLOOR FACING UP

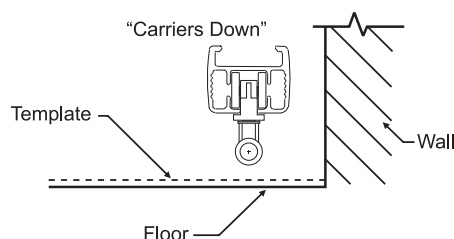


FIGURE 2: TEMPLATE ON CEILING FACING DOWN

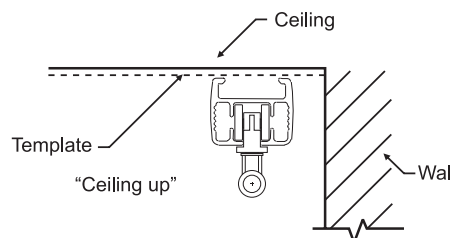


FIGURE 3: CRITICAL DIMENSIONS OF A CURVED TRACK


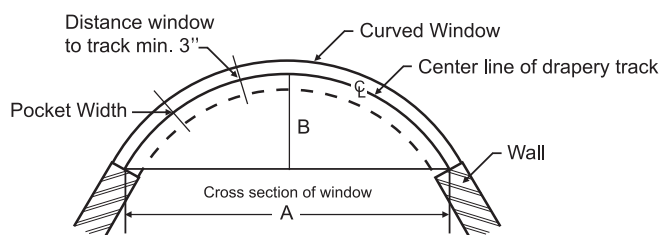


FIGURE 4: TOTAL MEASUREMENT OF CURVE

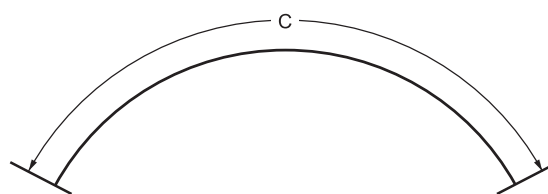

Template Submission Instructions

- Attach a copy of the purchase order to the template.
- Roll up template and place in a mailing tube.

DO NOT FOLD TEMPLATE

NOTE: When mailing, be sure to:

- Get a Tracking Number
- Include your return address
- Include your purchase order number on the label

Mail to:

Somfy Systems, Inc.
121 Herrod Blvd.
Dayton, NJ 08810
Attn: Drapery Department

Acceptable materials for making templates:

- Kraft Paper • Butcher Paper • Construction Paper

Somfy will not accept template made from the following materials:

- Newspaper • Plastic • Wax Paper • Fabric • Tissue Paper
- Roofing Paper • Existing Arch Shades • Wrapping Paper

NOTE: If the material used to make a template stretches, tears easily, will not lay flat or will mark the fabric - IT WILL NOT BE USED.

NOTE: Irismo™ 45 WireFree RTS is not compatible with bends and curves.

Drapery Order Form

Date of Order: _____ Account # _____ P.O. # _____ Sidemark: _____

Special Shipping Directions: _____

SOLD TO:

Business Name: _____
 Address: _____
 City: _____ State: _____ Zip: _____
 Phone: _____ Fax #: _____
 Email: _____
 Ordered By: _____
 Signature: _____

SHIP TO:

Business Name: _____
 Address: _____
 City: _____ State: _____ Zip: _____
 Contact Name: _____
 Phone: _____ Fax #: _____
 Email: _____

ORDER DETAIL: Please see next page for glossary and definition of terms.

| Item # | Room | QTY. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | 10 | 11 |
|--------|-------------|------|----------------|-------------|--------|------------|-------------|---------------|-----------------------|--------------|---------|------|-------------|--------|
| | | | Motor Part No. | Width (in.) | Tandem | Motor Side | *Track Type | Stack (L/R/S) | **If Bent: # of bends | Carrier Type | Bracket | | Butt Master | Splice |
| | | | | | | | | | | | Part # | QTY. | | |
| ex. | Living Room | 1 | 1001617 | 144 | | left | F | S | 2 | RF80 | 1780907 | 7 | NO | X |
| 1 | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | |

* For curved tracks, Somfy requires a template be provided. Please see [Directions for Creating a Template for Drapery Curves](#) for template information.

** For bent tracks, Somfy does not require a template. Please include the [Bent Drapery Tracks Measurement Form](#) for exact measurements per angle and return.

NOTE: Somfy includes a center splice every 16' of track. Please indicate in the "SPECIAL INSTRUCTIONS" section if your requirements differ from Somfy's standard.

CONTROLS: In the space provided below, please list the part number(s) for the control(s) you desire.

Given the nature of custom motorization products, control options and compatibility varies dramatically. If you would like further assistance with control options, simply note it in the field below and one of our customer service specialists will contact you upon the submission of your order.

SPECIAL INSTRUCTIONS

Please send to: e-mail: ordering_us@somfy.com Fax: 609-495-8117

(Continued on next page)

1 Motor Part Number

| | |
|---|---------|
| Irismo™ 35 (Mini DC) RTS..... | 1002952 |
| Irismo™ 35 (Mini DC) DCT..... | 1002951 |
| Irismo™ 45 WireFree RTS..... | 1002353 |
| Glydea® 35e Motor DCT with 10' plug | 1002465 |
| Glydea® 35e Motor RTS with 10' plug | 1001615 |
| Glydea® 35e Motor RS485 with 10' plug | 1002109 |
| Glydea® 35e Wired..... | 1002464 |
| Glydea® 60e Motor DCT with 10' plug | 1002545 |
| Glydea® 60e Motor RTS with 10' plug | 1001617 |
| Glydea® 60e Motor RS485 with 10' plug | 1002108 |
| Glydea® 60e Wired..... | 1001537 |

2 Width (Inches)

Motorized drapery tracks are custom built according to the specified width. Please note that the finished track width is measured pulley end to pulley end. For bent and curved tracks please provide the total of all wall measurements. When fabricating your drapery please add 1.5" to your return.

3 Tandem Y=Yes N=No

Tandem motorized systems utilize two drapery motors. Items needed for tandem systems should be noted in the Special Instructions Section of the order form.

Dry Contact

| | |
|--------------------------|-----------|
| Splitter..... | # 9015442 |
| 7ft Modular Cable | # 9013346 |
| 25 ft. Modular Cable.... | # 9013149 |
| 35 ft. Modular Cable.... | # 9013338 |

Tandem alternative = 2 one way tracks

4 Motor Side

L=Left Side R=Right Side

Choose the motor side best suited for your installation.

5 Track Type

A-I See below O=Other

NOTE: Somfy requires a template for all curved tracks. Please see *Directions for Creating a Template for Drapery Curves* for necessary information.

| | | |
|-------------------------|---|---|
| A One way | D One way w/Bend R = 30 cm max (11.8") | G Center Opening w/2 Bends R = 30 cm max (11.8") |
| B Center Opening | E Center Opening w/Bend R = 30 cm max (11.8") | H One Way w/Continuous Curve R = 300 cm max (118") |
| C Asymmetrical | F One way w/2Bends R = 30 cm max (11.8") | I Center Opening w/Continuous Curve R = 300 cm max (118") |


6

Stack

L=Left

R=Right

S=Split

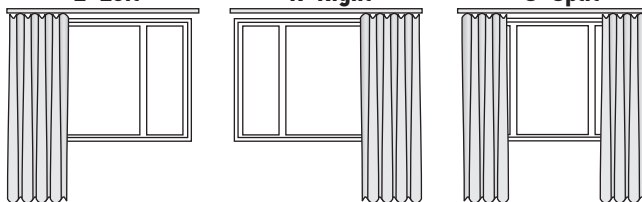

7

If Bent: # of Bends

1=1 Bend, 2=2 Bends, 3=3 Bends, etc

NOTE: Somfy requires exact angle measurements for all bent tracks. Please submit completed and signed **Bent Drapery Track Measurement Form** with all bent track orders.

8

Carrier Type

1=1 Bend, 2=2 Bends, 3=3 Bends, etc

PP=Pinch Pleat

(QTY of 3 per foot included)

RF80 = RippleFold® 80% fullness

(QTY of 5 per foot spaced every 2 3/8" included)

RF100 = RippleFold® 100% fullness

(QTY of 6 per foot spaced every 2 1/8" included)

RF120 = RippleFold® 120% fullness

(QTY of 7 per foot spaced every 1 7/8" included)

9

Brackets

NOTE: Brackets are not included and must be ordered separately.

Part Numbers

One Touch Ceiling Bracket (not recommended for curved tracks)....# 1780907

4.5"-6" Wall Mount Bracket.....# 1782054

8.75"-10.25" Double Wall Mount Bracket.....# 1782053

Swivel Ceiling Bracket (strongly recommended for curved tracks)....# 1780906

Somfy recommends one (1) bracket by each pulley and one (1) bracket every 24". Additionally, one (1) bracket should be placed on each side of a splice if used.

10

Butt Master

Y=Yes N=No

Only available for RippleFold® center opening systems.

Quantity 2 required; please note item numbers in **Special Instructions Section** of the order form item #1780953.

11

Splice

X=Special splice instructions

Somfy includes a center splice every 16ft of track. Please indicate in the Special Instructions Section if your requirements differ from Somfy's standard.

DECOFLEX RTS, SDN & DRY CONTACT

Button Engraving Order Form

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐
 Name: _____
 Address: _____
 City: _____ State: _____ Zip: _____
 Phone: _____

Project Information

Project Name: _____
 Installer Name/Company: _____
 P/O #: _____ Order #: _____
 Area: _____
 Room: _____

STYLE

Button Color

WHITE ☐ #9018259 IVORY ☐ #9018260 BLACK ☐ #9018261

Switch Type

RTS ☐ Somfy Digital Network (SDN) RS485 ☐ Dry Contact ☐
Available in White only

ENGRAVING OPTIONS

| Buttons (A-F) 9 Characters Maximum (including spaces) | | QTY. |
|--|--|------|
| A | | |
| B | | |
| C | | |
| D | | |
| E | | |
| F | | |
| G | | |
| H | | |


(F): Command Button by default is labeled STOP on the DecoFlex RTS and Dry Contact Switches only.

NOTE: G and H buttons by default are labeled as follows:


(G = down ▼ icon) WHITE - #9018263 IVORY - #9018264 BLACK - #9018265
 (H = up ▲ icon) WHITE - #9018267 IVORY - #9018268 BLACK - #9018269

If you prefer they can be substituted with an associated command
 NAME (UP, DOWN, LOWER, etc.) up to 5 characters.


DecoFlex RTS



DecoFlex SDN



DecoFlex Dry Contact



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

Payment terms of your account will apply.

All engraved switches are custom made and are non-cancellable.

Please send form to: Fax # 609-495-8117 or e-mail to: Ordering_us@somfy.com

SOMFY SYSTEMS INC
 121 Herrod Blvd.
 Dayton, NJ 08810
 Phone: (800) 22-SOMFY
 NJ: (609) 395-1300
 Fax: (609) 495-8118
somfysystems.com

Florida
 6100 Broken Sound Pkwy.
 N.W., Suite 14
 Boca Raton, FL 33487
 Phone: (877) 227-6639
 Fax: (561) 995-7502

California
 15291 Barranca Parkway
 Irvine, CA 92618-2201
 Phone: (877) 727-6639
 Fax: (949) 727-3775

SOMFY ULC
SOMFY Canada Division
 5178 Everest Drive
 Mississauga, Ontario L4W2R4
 CN: (905) 564-6446
 Fax: (905) 238-1491